


MINI MITTER ELECTRIC DRIVE, Model MM5-EL

The **AVW Stainless Steel Mini Mitter Curtain -Electric Drive** has a unique basket motion that provides aggressive motion on the vehicle surface not just at the top of the basket.

It is constructed of high grade stainless steel,
telescopic height adjustment allows for easy installation
even in settings with limited or obstructed heights. There are no bearings to grease on this unit.
Regular maintenance is virtually eliminated.

Bearing less design
Electric drive
Circular motion
Adjustable height
Low maintenance
Stainless steel
Circular motion that simulates
that of hand washing

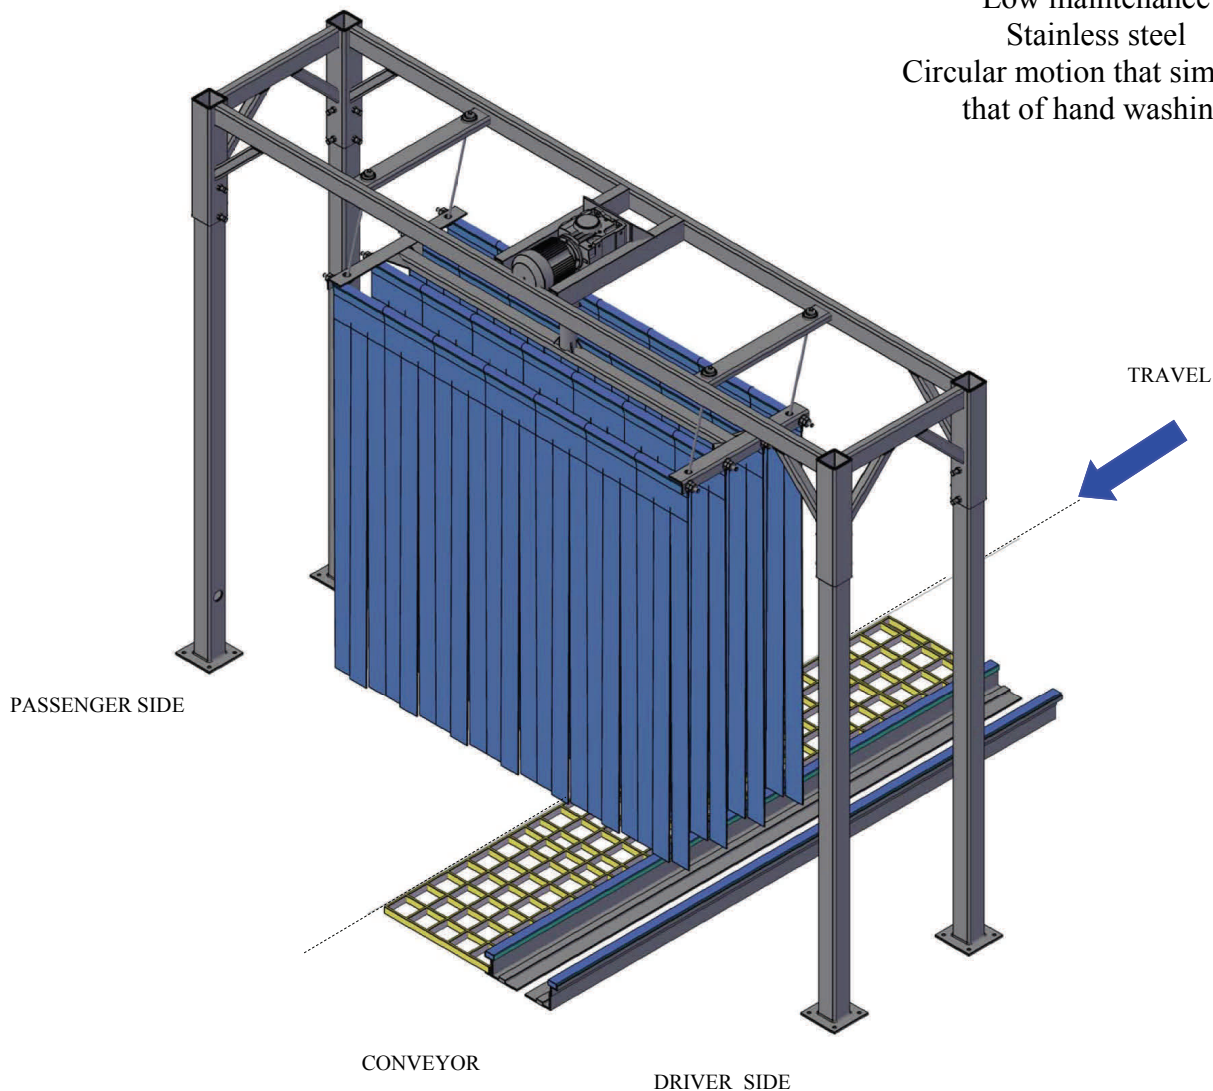


A.V.W. Equipment Co. Inc. 105 South 9th Avenue, Maywood, IL, 60153
Phone: 708-343-7738 Fax: 708-343-9065 email: info@avwequipment.com Website: www.avwequipment.com

MINI MITTER ELECTRIC DRIVE, Model MM5-EL


SPACE REQUIREMENT

- A — 156'
- B — 31''
- C — 114'' adjustable

Electric Motors for basket drive:
2.HP, 1700 RPM
Water: 1/2" NPT Outlet
Tunnel Center Line 28" from inside
Conveyor or Rail

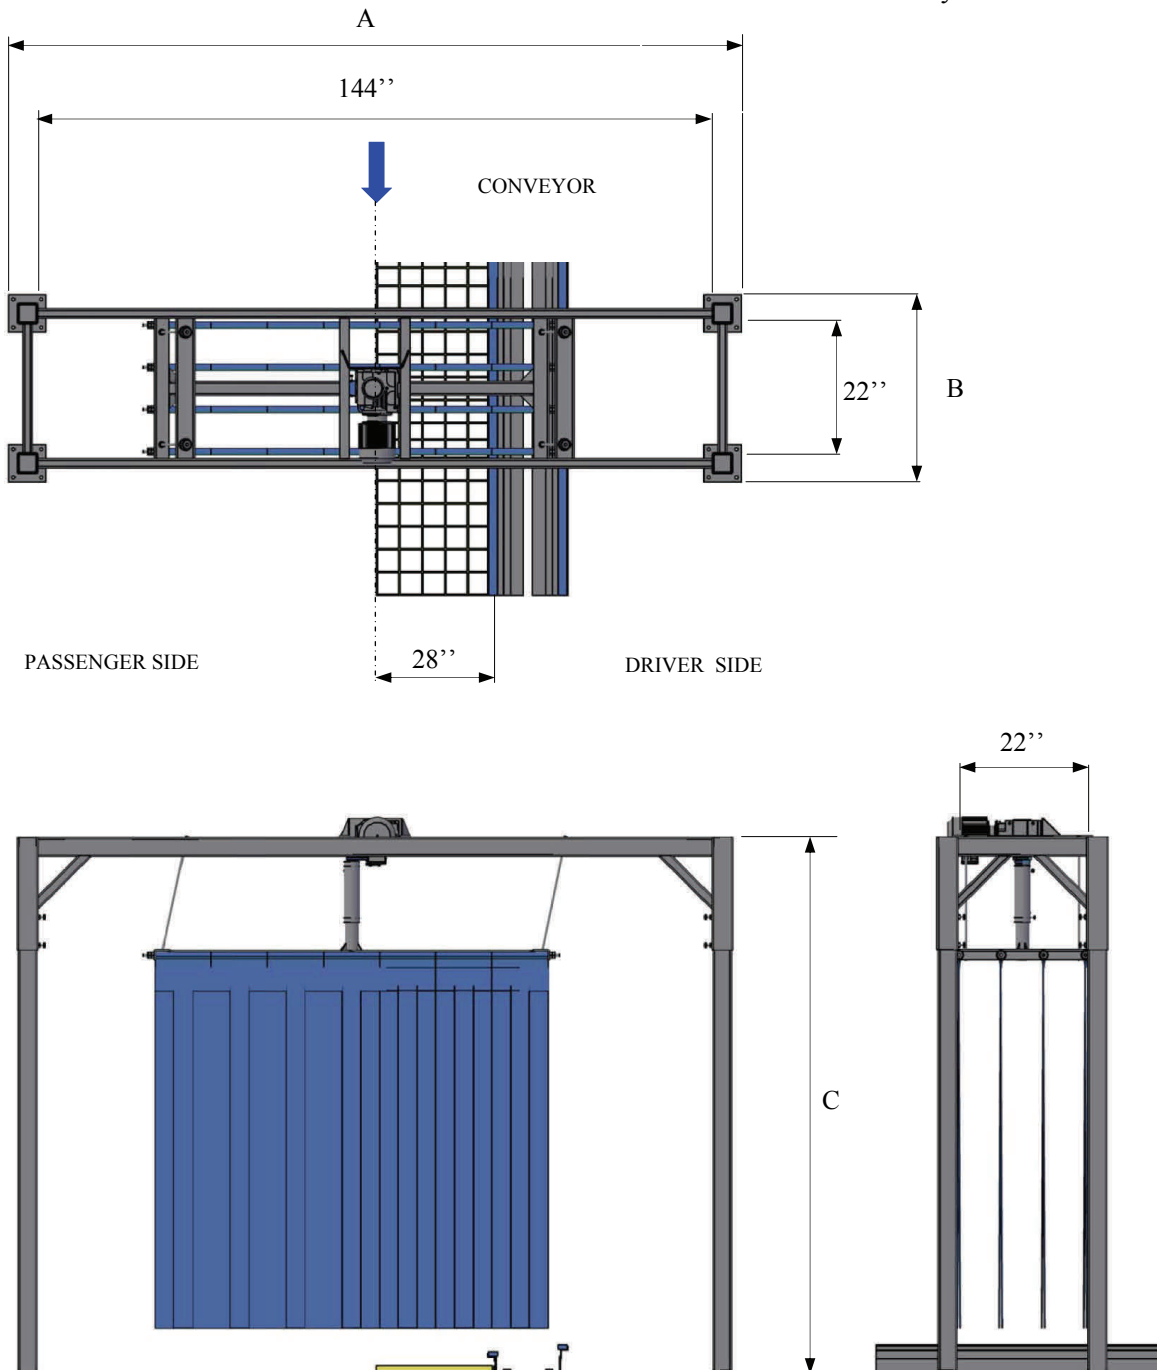

MINI MITTER ELECTRIC DRIVE, Model MM5-EL

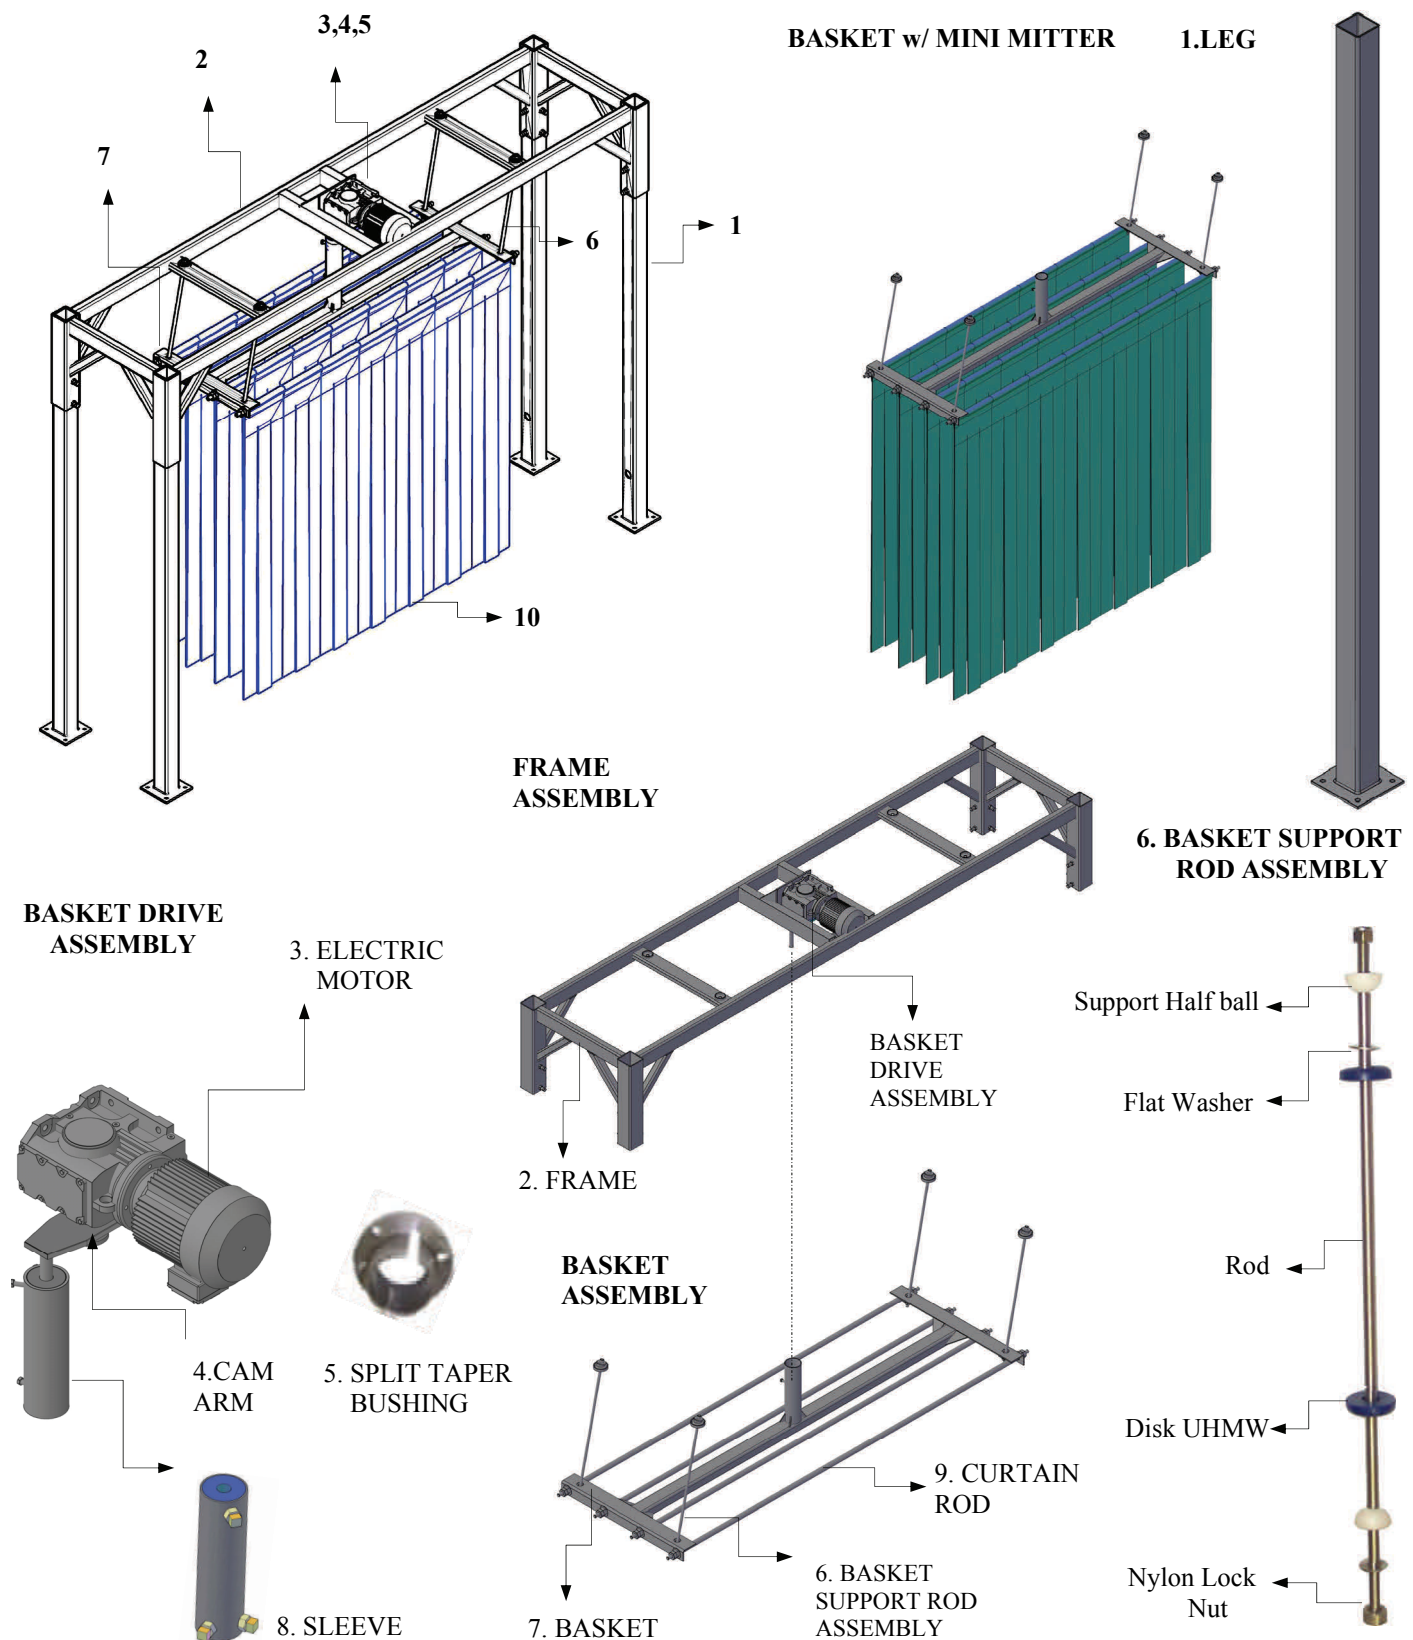

MINI MITTER ELECTRIC DRIVE, Model MM5-EL

ITEM	DESCRIPTION	PART No.	Qty.
1	LEG	MC1A	4
-	FRAME ASSEMBLY:	MM5B-7-EL	1
2	FRAME	MM5BA-7-EL	1
-	Square Head Screw ½" - 13 x 1 ½" lg. (for sleeves)	SQHS1213150	16
-	-Hex Head Screw 3/8"-16x2"Lg (Fully threaded, for pillow block adjusted)	HHCS1213125	8
-	BASKET DRIVE ASSEMBLY:	MM4BB-EL	1
3	Electric Gear Motor, El. Motor SK9012.1-100L/4-41.65-A (Angled)	GRMTR2HP--48-230-460	1
-	3PH, HZ60, HP 2.0, RPM 1750	(GRMTR2HP--48-380	2
-	Gear Drive: RPM 76, Ratio 41.65, HP 1.0, V 230/460, PH 3, Hz 60/50	For EUROPE)	1
4	Cam Arm (w/welded weld-on hub), Stainless Steel	MC2BBA-P1-0615	1
5	Split Taper Bushing P1 1 3/8"	STB-P1X138	
-	Hex Head Cap Screw 3/8"-16 x ¾"lg. (motor's fastener)	HHCS3816075	4
6	BASKET SUPPORT ROD ASSEMBLY:	MC1C	4
-	Basket support Rod ½" x 27" lg.	MC1C1-102307	4
-	Basket support Disk UHMW	MC1C2	8
-	Basket support Half ball	MC1C3	8
-	Flat Washer ½"I.D. x 1 ¼" O.D.	FW12125	8
-	Nylon Lock Nut ½"-13	NLN1213	8
-	BASKET ASSEMBLY:	MM5D-7	1
7	BASKET FRAME 7"	MM4DA-7	1
-	SLEEVE ASSEMBLY:	MC1DB	1
8	Sleeve	MC1DB1	1
-	UHMW Bushing 1" I.D.	MC1DB2	1
-	Square Head Screw 3/8"-16x ¾" lg.	SQHS3816075	3
-	Hex Nut 3/8"-16	HN3816	3
9	CURTAIN ROD ASSEMBLY:	MC2DC	4
-	Curtain Rod 7'4"lg.	MC2DCA	4
-	Plastic Spacer ¾" I.D.x2" O.D. x 1/8" width	MC1DC2-3-4x2x1-8	8
-	Plastic Hex Nut ¾"-10	PLHN3410	16
10	CURTAIN (CLOTH)	MC1E	36
-	WATER INSTALLATION:	MM5L	
-	----- TOP WATER MANIFOLD ASSEMBLY:	WA1LA	2
-	Top Water Manifold (straight, tubing 1/2" O.D. x 34" lg. w/5 water outlets)	WA1LAA	2
-	Hex Head Plug ½" NPTM (white plastic)	SAE140109E-8	2
-	Barb 1/2"x ½" NPTM	BRBPP050X050	2
-	Nozzle ¼" NPTM	NZ1-4	10
-	----- Pipe Clamp ¾", for Water Manifold (w/screw fasteners ¼"-20)	PPP3-4	4
-	-----		

