



OSCILLATING HIGH PRESSURE ARCH, Model OR1

*The Stainless Steel **Oscillating Top and Stationary Side** High Pressure manifolds provides an even spray of the vehicle with up to 1000 Lbs. of pressure. Top Oscillator blasts the front, top and rear of vehicles. Stationary Side Manifolds the sides, tires and rockers areas.*

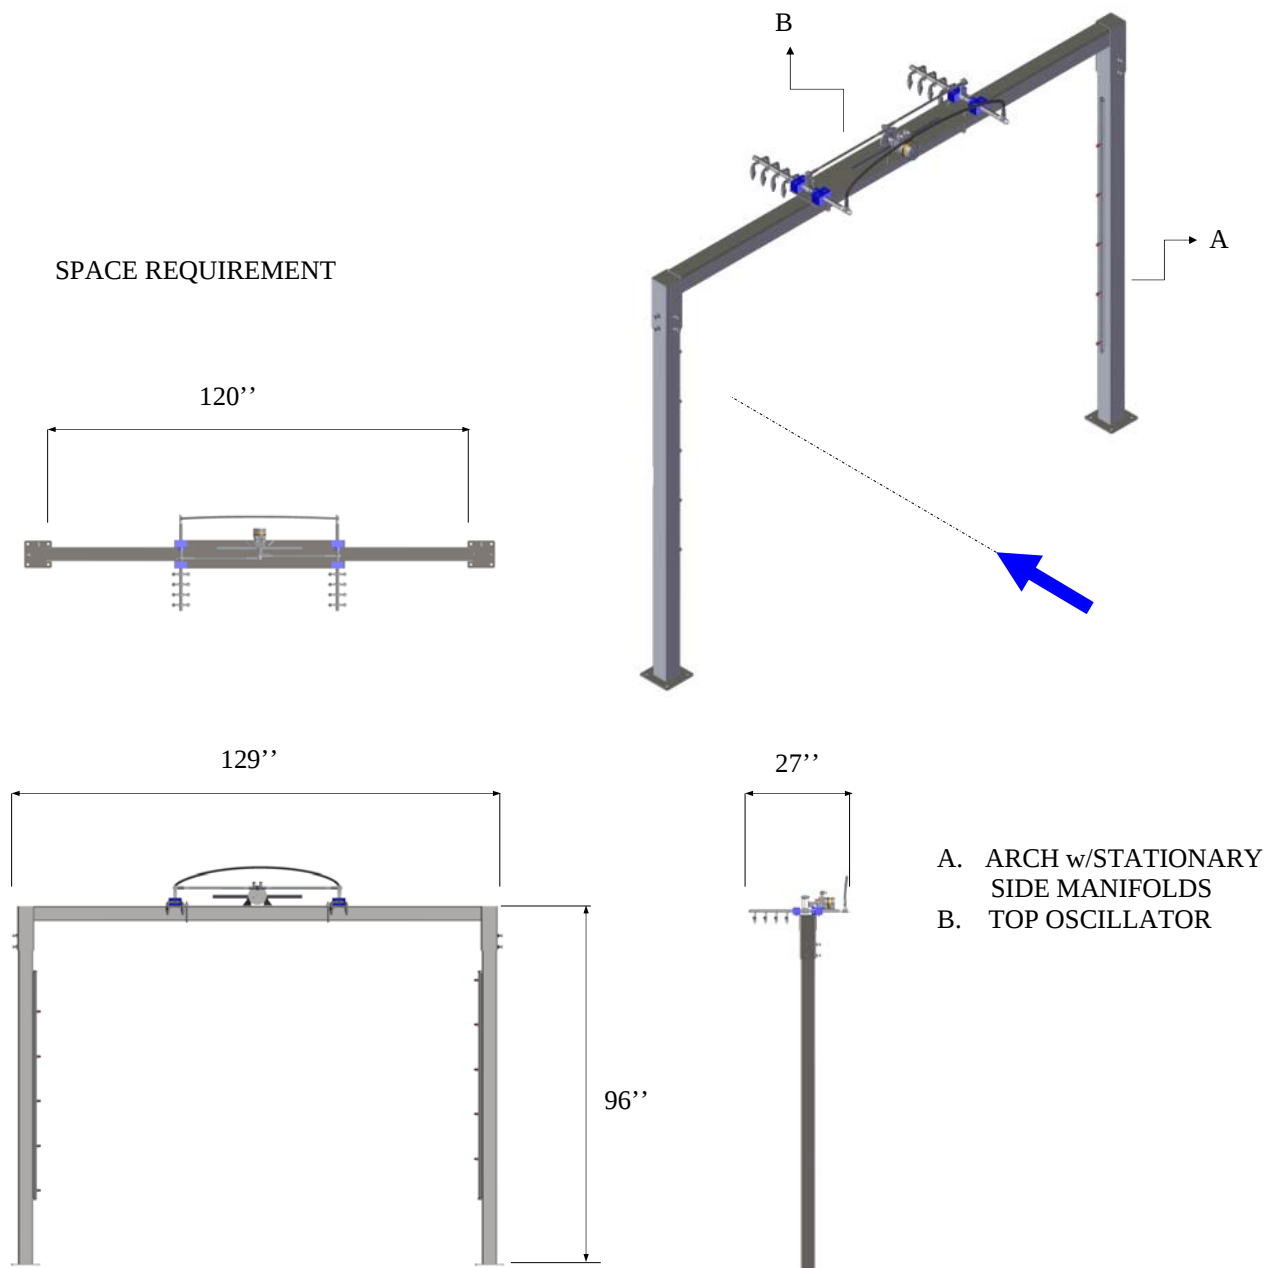

A.V.W. Equipment Co. Inc. 105 South 9th Avenue, Maywood, IL, 60153
Phone: 708-343-7738 Fax: 708-343-9065 email: info@avwequipment.com Website: www.avwequipment.com

OSCILLATING HIGH PRESSURE ARCH, Model OR1

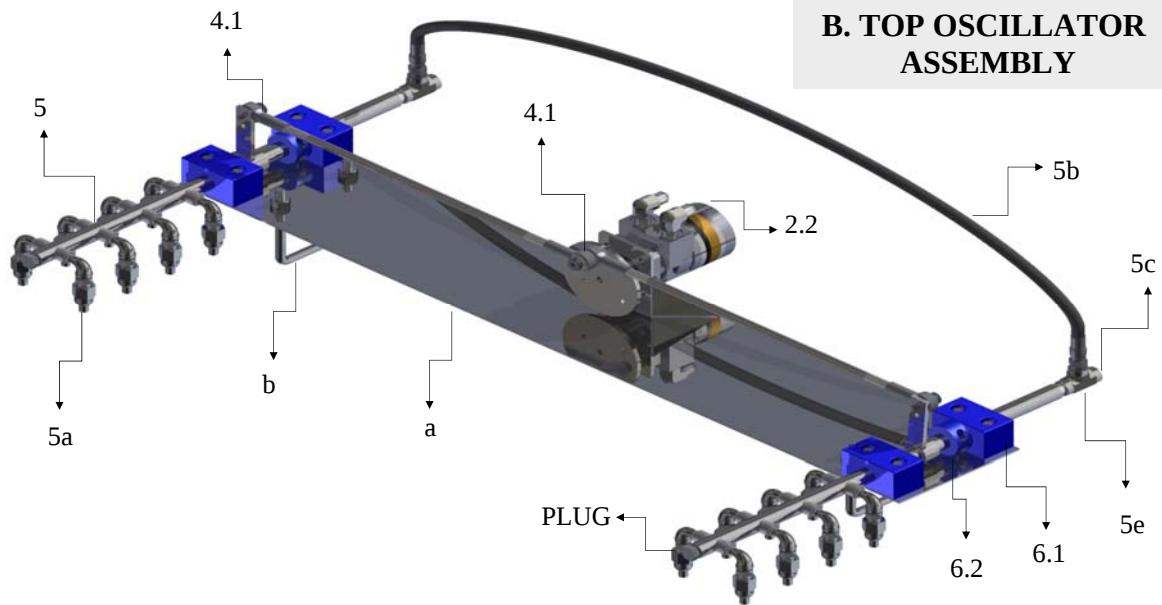

ITEM	Description	PART NUMBER	QTY
1	ARCH w/Screw Fastener Sets	AA0	1
A	LEG w/STATIONARY SIDE MANIFOLD	AA1A	2
B	TOP OSCILLATOR ASSEMBLY	OS1C	1
a	w/PLATE		1
b	w/SQ.U BOLTS 3/8" SIZE and	UB-SQ0375x1400	2
c	WASHERS 3/8" and	FW38	4
d	HEX NUTS 3/8"	HN3816	4
2	MOTOR MOUNT ASSEMBLY,		1
2.2	HYDRAULIC MOTOR	TB1ADBM	1
-	90° 1/2" JIC -1/2" NPT, 2/MOTOR	SAE070202-8-8	2
4	OSCILLATING DISK	SBZADBA	1
-	w/HEX NUTS 1/4"	HN1420	2
4.1	OSCILLATING ARM ASSEMBLY	OS1CBB-17	2
-	BALL JOINT ROD END 1/2-20	BJ1/2-20	4
-	SHOULDER BOLT 1/2"x2" LG	SB1ABD1	4
-	w HEX NUT 3/8" and	HN3816	4
-	TREADED ROD 1/2" x 17" Lg	OS1CBB1-17	2
-	CAM ARM	OS1-CAM1	2
5	TOP MANIFOLD, 24" LG	OS1DMA	2
5a	MEG NOZZLES 1/4, (#0504), Stainless Steel	1-4MEG-0504	16
5b	HYDRAULIC HOSE (3/8" x 5' LG)		1
5c	FEEMALE TEE 1/2"		1
5d	1/2" JIC -1/2" NPT, MALE	SAE070102-8-8	1
5e	90° 1/2" JIC -1/2" NPT, MALE	SAE020202-8-8	1
5f	90° Street ELBOW 1/4" NPT, Stainless Steel	EL90-5-304025	16
5g	PLUG 1/2"	PLUGPP050	2
6.1	UHMW BLOCK MANIFOLD	PO1C2	4
6.2	UHMW SPLIT COLLAR, 1" O.D.	RT1ODA	2

